



μ' (μ'')-Frequency

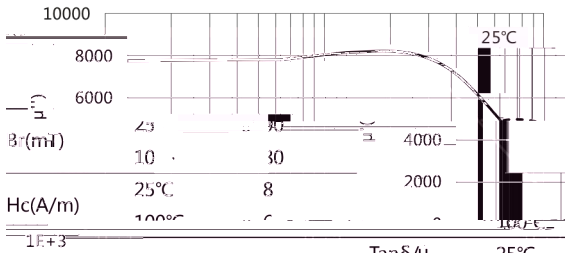


| | | |
|----------------------------------|--------|----------|
| Initial permeability μ_i | 25°C | 7500±30% |
| Saturation magnetic flux density | 8s(mT) | 25°C 390 |
| Hc(A/m) | 100°C | 160 |
| Coercivity | | |

μ_i -Temperature

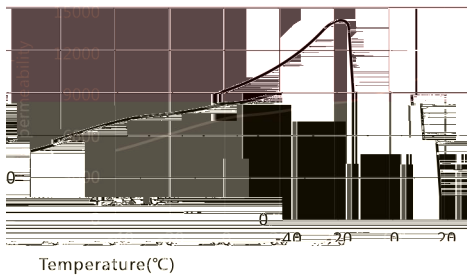


| | | |
|--|-----------------|--------------------|
| Hysteresis material constant | $D_p (10^6/mT)$ | 25°C < 0.2 |
| Relative permeability | α_{μ} | -40°C~25°C 0.5~1.5 |
| Electrical resistivity $\rho (\Omega \cdot m)$ | | 0.5 |
| Initial permeability | | 12000 |
| Test core | toroid (mm) | |

H : 5

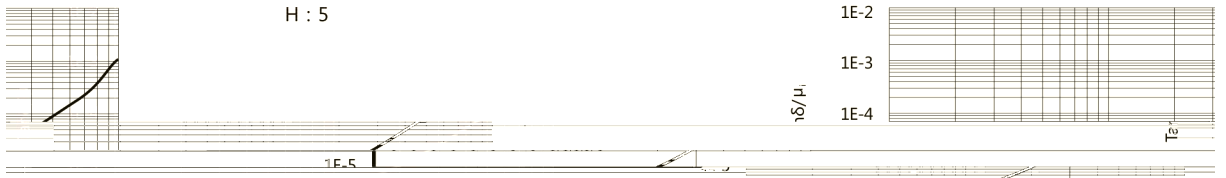

B-H

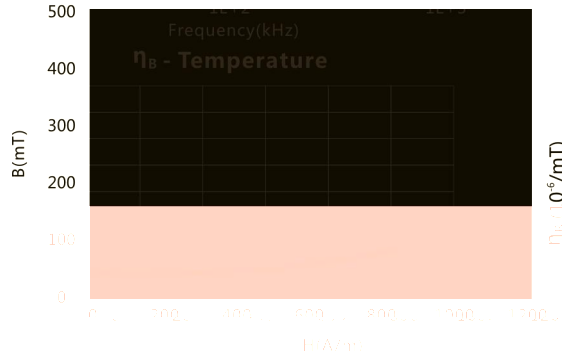

μ_i - Temperature

