

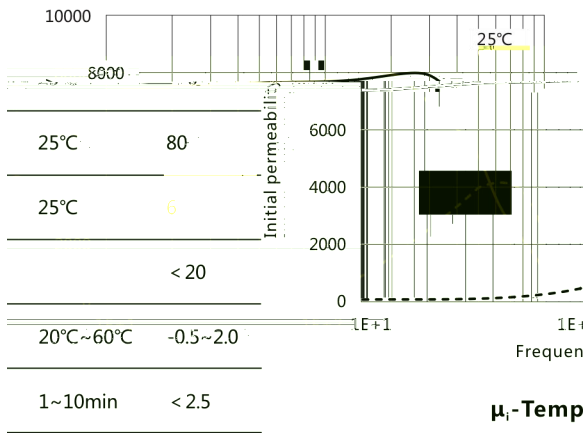


μ' (μ'')-Frequency

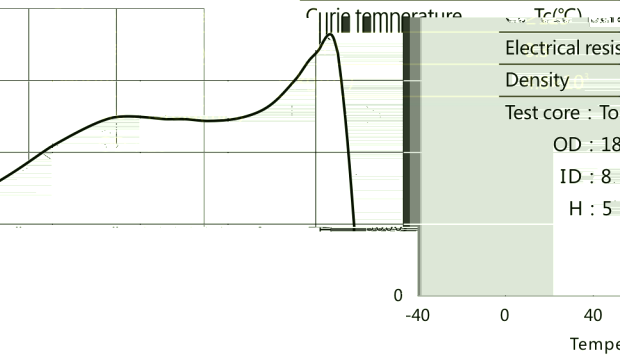


Initial permeability	μ_i	25°C	7500±30%
Flux density			1194A/m
Remanent			Br(mT)
Coercivity			Hc(A/m)
Relative loss factor	$\tan\delta/\mu_i$		($\times 10^{-6}$)
Relative temperature coefficient	α_{μ_i}		($\times 10^{-6}/^{\circ}\text{C}$)
Disaccommodation factor	D_F		($\times 10^{-6}$)


μ_i -Temperature

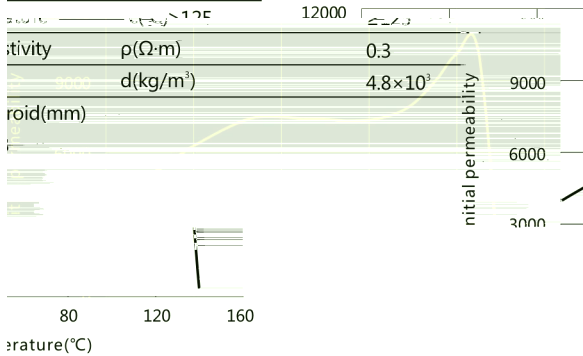


μ_i -Frequency

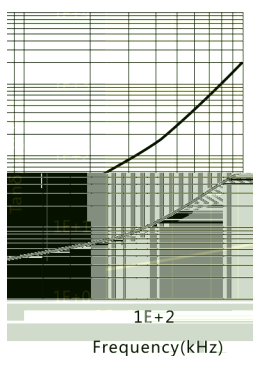

B-H

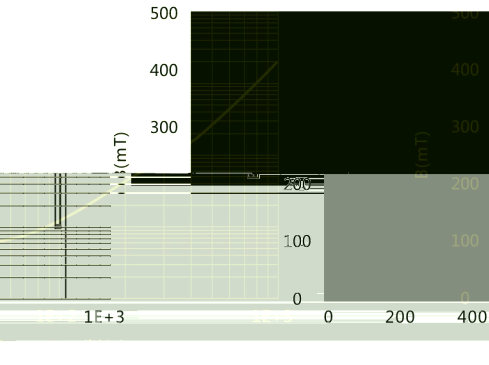


$\tan\delta/\mu_i$

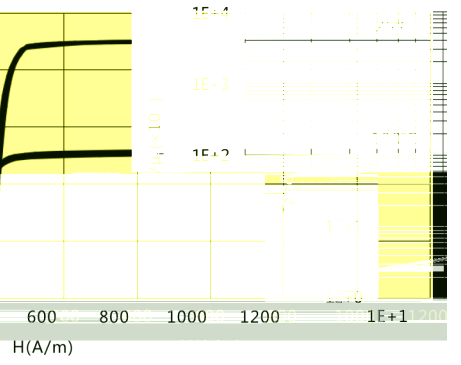

Z-Frequency

N=10TS, Φ 0.35mm, T=25°C

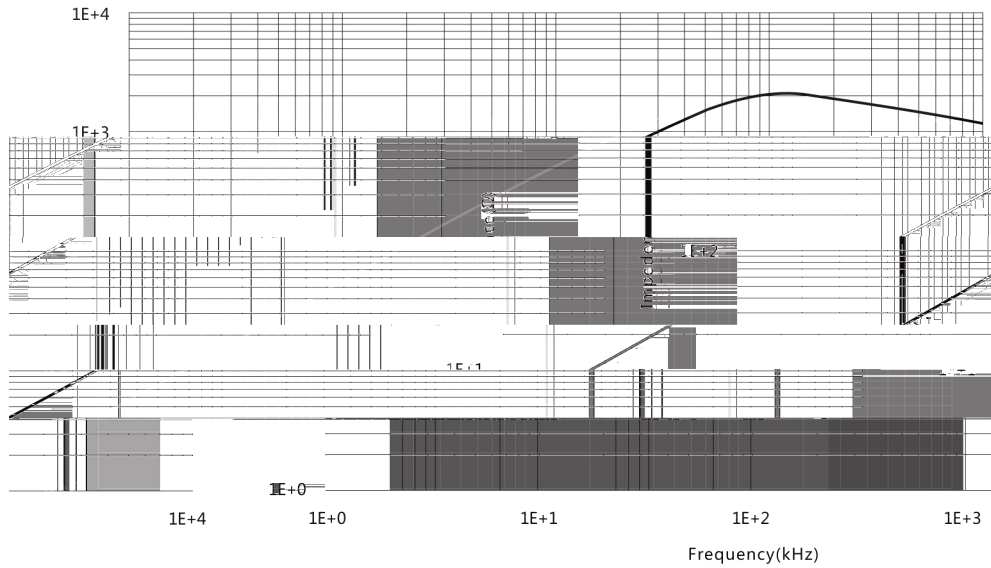

Bs-Temperature

H=1194A/m

