



**Complex permeability vs. Frequency**

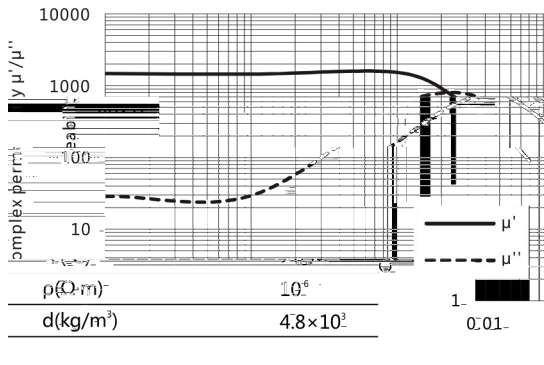


Initial permeability	$\mu_i$	25°C	1300±20%
Saturation magnetic flux density	$B_s$ (mT)	25°C	240
Relative loss factor	$\frac{W}{P}$	25°C	<1.5
Relative temperature coefficient	$\alpha_{\mu}$	20~60°C	8
Curie temperature	$T_c$ (°C)		>85
Electrical resistivity			
Density			
Test core : Toroid(mm)			

**Relative loss factor vs. Frequency**

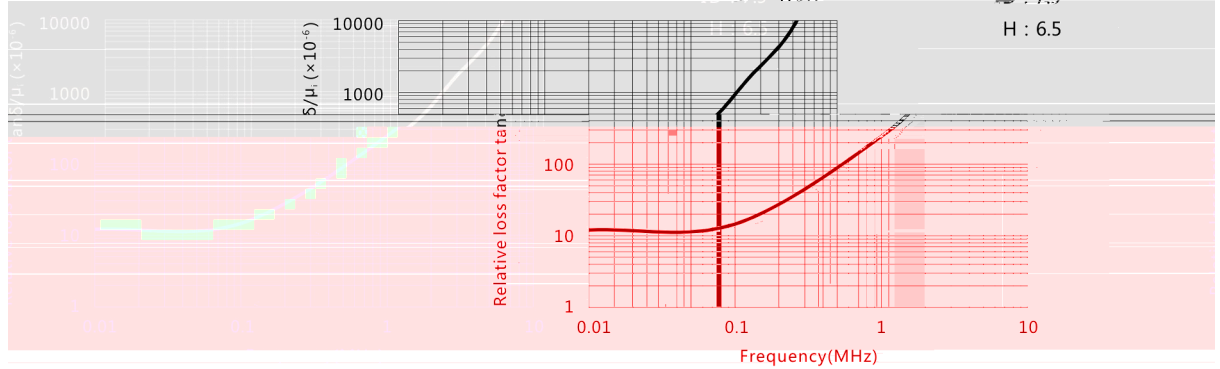

**Flux density vs. Temperature**

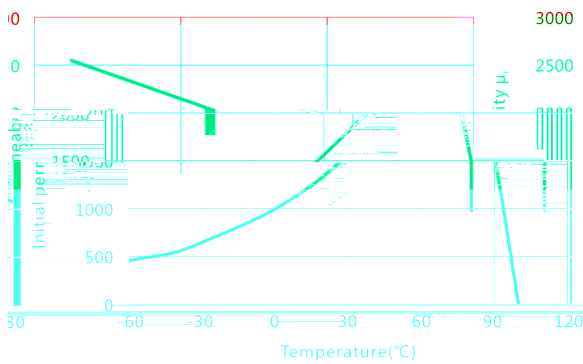

**Initial permeability vs. Temperature**

